

DATA SHEET

Characteristics :




- Free combination of diverse graphics, independent light emitting modules, uniform light emission.
- No strobe lights to create a differentiated environment and lengthen the visual effect.
- High luminous efficiency, beautiful and fashionable, 3 years warranty.

Model: MLL004-A

Technical Parameters:


Model	MLL004-A
Power	15W / 30W
PF	0.9
CRI	≥ 80
CCT	4000K
Luminous efficiency	122m/w / 107m/w / 131m/w / 113lm/w
Lumens	(15W) 1840lm / 1620lm (30W) 3900lm / 3600lm
Corner	120°
UGR	≤ 30
Dimension	L600*W70*60mm/ L1200*W70*60mm
Color	White black
Input Voltage	220V-240V
IP protection	IP20
Warranty	3 years
Certification	CE RoHS

Product

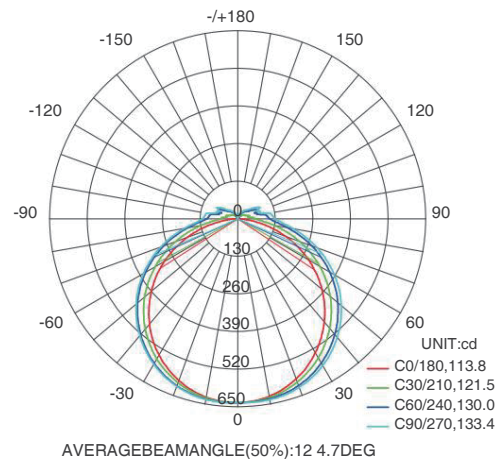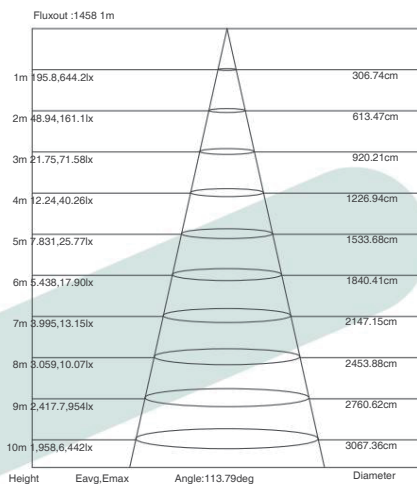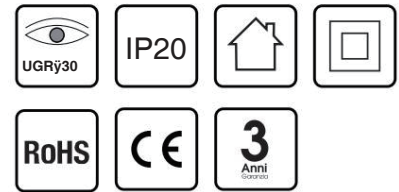

Linear light (120°)


Product size

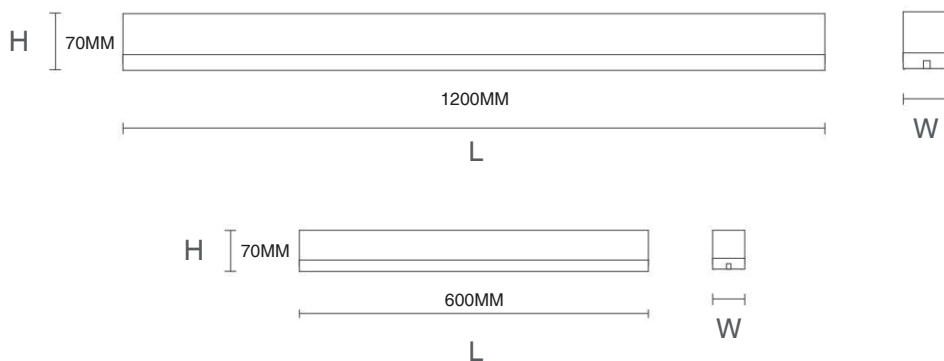

Connection form



Gruppi di combinazione, stili vari

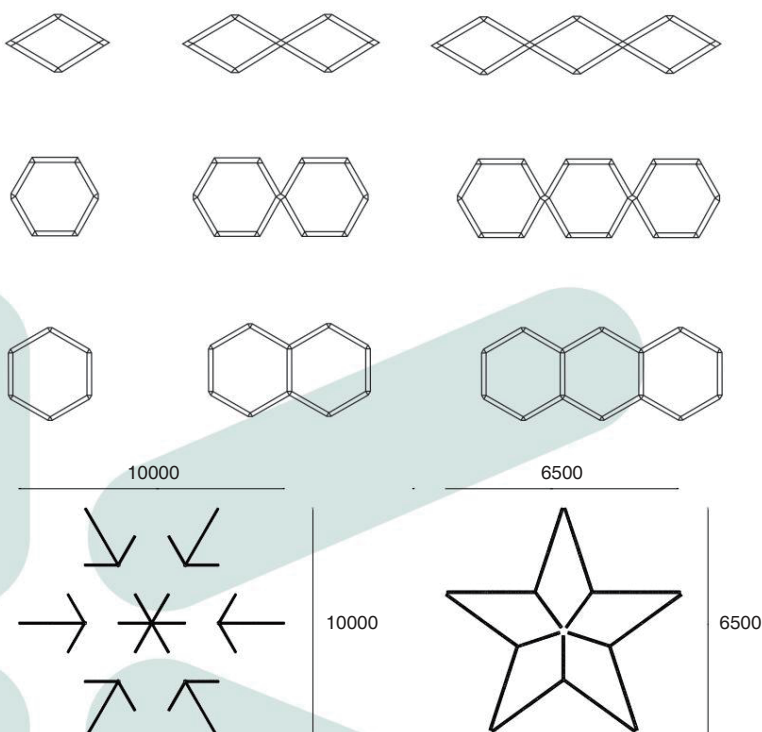

Accessories



LA0302

Installation method

